

36" Integrated All Refrigerator-Tall

Integrated refrigeration can be used anywhere in the home. It merges seamlessly into the décor, with no visible hinges or grilles. Model 736TR is a 36" wide tall unit with refrigerator storage in the upper cabinet, and also in the lower drawers with a crisper cover standard in the upper drawer. Two distinct temperature zones ensure the freshest food and energy efficiency. This model is ENERGY STAR® qualified for energy efficiency.

FEATURES

- Custom front panels and hardware allow for infinite design options.
- Point-of-use refrigeration that can be placed anywhere in the home.
- Microprocessor maintains precise control, within 1° of set temperature in each of two temperature zones.
- Easy-access, illuminated touch control panel.
- Bright interior lighting in cabinet and drawers.
- Adjustable spill-proof glass shelves, door shelves and dairy compartment.
- Adjustable deli drawer with shelf for storage of smaller items.
- Removable crisper cover on upper storage drawer.
- Upper storage drawer is deep enough for bottled drinks to stand upright.
- Smooth-glide, full-extension storage drawers.
- Alarm feature will sound an audible beep if door or drawer is left open.
- 90° door stop built into hinge.
- Star-K compliant with harness kit.



MODEL

Design

INTERIOR FEATURES

- Refrigerator
 - Dual Refrigeration
 - 2 Temperature Zones
 - 3 Adjustable Glass Shelves
 - 1 Stationary Shelf
 - 2 Storage Drawers
 - Removable Crisper Cover
 - 4 Removable Drawer Dividers
 - Stationary Crisper Drawer 3 Adjustable Door Shelves Adjustable Dairy Compartment Egg Container

ACCESSORIES

• Stainless steel front panels with tubular or pro handles-80" or 84" finished height.

736TR

Integrated


- Stainless steel tubular and pro handles.
- Dual installation kit for installation with column, tall or drawer model.
- Dozen egg container.


Accessories are available through your Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.





OVERALL DIMENSIONS





Unit dimensions may vary by $\pm 1/8$ ".

TOP VIEW

SPECIFICATIONS

Overall Width		36"
Overall Height		80"
Overall Depth		24"
Door Clearance		34 ¹ /2"
Drawer Clearance		19 ¹ /2"
Refrigerator Capaci	ity	20.8 cu ft
Opening Width		36"
Opening Height		80"
Opening Depth		25"*
Electrical Requirem		115 V AC, 60 Hz dedicated circuit
Shipping Weight		480 lbs


SUB-ZERO

36" Integrated All Refrigerator-Tall

*Depth is 24" from the front of the unit to its back. Your design may necessitate moving the unit back, or cabinets forward to achieve a flush fit. This will require a minimum opening depth of 25".

INSTALLATION SPECIFICATIONS


Opening Dimensions

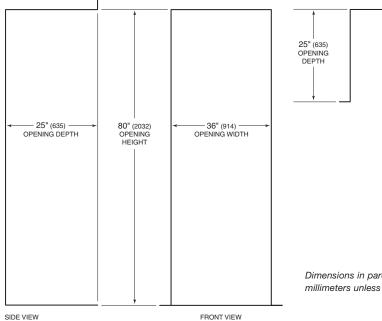

Dimensions in parentheses are in millimeters unless otherwise specified.

SIDE VIEW

Location of Electrical Supply



INSTALLATION NOTES

Stainless steel panels with handles are available as accessories. These panels are not installed at the factory.

Complete installation specifications, including panel sizes, can be found on our website, subzero.com/specs.